

AD 742117

SCRIPPS INSTITUTION OF OCEANOGRAPHY  
UNIVERSITY OF CALIFORNIA, SAN DIEGO  
Dr. William A. Nierenberg, Director  
Principal Investigator

ADVANCED OCEAN ENGINEERING LABORATORY

FINAL TECHNICAL REPORT ✓  
OVKRPRESSURES DUE TO EARTHQUAKES PROJECT

Sponsored by  
ADVANCED RESEARCH PROJECTS AGENCY  
ADVANCED ENGINEERING DIVISION  
ARPA Order Numbers 1348, 1730 and 1607  
Program Code NR 293-005

Administered by the OFFICE OF NAVAL RESEARCH  
Contract N00014-69-A-0200-6012  
Contract Effective Date: December 15, 1968  
Contract Expiration Date: December 31, 1972  
Total Contract Amount: \$2,661,808.00

SIO Reference Number 72-18

AOEL Report #27

Reproduced by  
NATIONAL TECHNICAL  
INFORMATION SERVICE  
Springfield Va 22151

D D C  
RECORDED  
MAY 19 1972  
REGISTERED  
C

26  
R

# DISCLAIMER NOTICE

THIS DOCUMENT IS THE BEST  
QUALITY AVAILABLE.

COPY FURNISHED CONTAINED  
A SIGNIFICANT NUMBER OF  
PAGES WHICH DO NOT  
REPRODUCE LEGIBLY.

DOCUMENT CONTROL DATA - R & D

Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified

1. ORIGINATING AGENCY (Corporate Number)  
The Regents of the University of California  
University of California, San Diego  
La Jolla, California 92037

10. REPORT SECURITY CLASSIFICATION

Unclassified

11. GROUP

Not Applicable

2. REPORT TITLE

Final Technical Report on "Overpressures Due to Earthquakes Program" of the Advanced Ocean Engineering Laboratory

4. DESCRIPTIVE NOTES (Type of report and inclusive dates)

September 15, 1969 to March 31, 1972

5. AUTHOR(S) (First name, middle initial, last name)

Dr. Hugh Bradner  
Prof. John D. Isaacs

6. REPORT DATE

May 2, 1972

76. TOTAL NO OF PAGES

25

75. NO OF REFS

22

80. CONTRACT OR GRANT NO

N00014-69-A-0200-6012

80. ORIGINATOR'S REPORT NUMBER(S)

SIO Reference No. 72-18

8. PROJECT NO

90. OTHER REPORT NO(S) (Any other numbers that may be assigned this report)

AOEL Report #27

10. DISTRIBUTION STATEMENT

Distribution of this document is unlimited

11. SUPPLEMENTARY NOTES

12. SPONSORING MILITARY ACTIVITY

Advanced Research Projects Agency  
c/o Office of Naval Research  
Arlington, Virginia 22217

13. ABSTRACT

This Final Summary Report reflects the technical status of a project conducted within the Advanced Ocean Engineering Laboratory at the Scripps Institution of Oceanography. The project is: Overpressures Due to Earthquakes -- a study of earthquakes and resultant overpressures as they effect ocean-going vehicles and sub-surface structures.

KEY WORDS	LINE A		LINE B		LINE C	
	ROLE	WT	ROLE	WT	ROLE	WT
Advanced Ocean Engineering Vibrating String Accelerometer Seaquake Seaquake Hazards Chart Pressure Pulse Ground Acceleration Vertical Compression Wave Acceleration Spectrum World Seismicity Maps Water Pressure Earthquake Statistics Submarines						

Disclaimer

The views and conclusions contained in this document are those of the authors and should not be interpreted as necessarily representing the official policies, either expressed or implied, of the Advanced Research Projects Agency or the U. S. Government.

FINAL TECHNICAL REPORT

OVERPRESSURES DUE TO EARTHQUAKES PROJECT

PRINCIPAL INVESTIGATOR:

Dr. William A. Nierenberg, Director  
Scripps Institution of Oceanography  
University of California, San Diego  
714/453-2000, Ext. 1101

PROJECT SCIENTISTS:

Dr. Hugh Bradner  
Scripps Institution of Oceanography  
University of California, San Diego  
714/453-2000, Ext. 1752

Professor John D. Isaacs  
Scripps Institution of Oceanography  
University of California, San Diego  
714/453-2000, Ext. 1141

## TABLE OF CONTENTS

	Page
Abstract	1
Introduction	1
Calculation of Hazards Chart	2
Ground Acceleration: Qualitative Argument	3
Ground Acceleration: Quantitative Argument	3
Water Pressure Due to a Seismic Wave	5
Earthquake Statistics	6
Hazard Estimates	7
Discussion of Factors Used in Hazards Calculation	
Ground Acceleration	9
Correction Factor for Submarine Depth	10
Region of High Seismicity	10
Probability of Other Size Pressure Increase	10
Acknowledgements	11
References	12

### TABLES

Table I - Maximum Ground Accelerations and Durations of Strong Phase of Shaking	14
Table II - Area in 1000 Mi <sup>2</sup> Covered by Ground Acceleration (% g)	15
Table III	16
Table IV - Calculated $\sin(kh)/kh$ Correction Values for Various Depths and Seismic Wave Frequencies	16
Table V - Frequency of Occurrence of Shallow Earthquakes	17
Table VI - Relative Total Areas Affected by Earthquakes During 7-Year Period	17

### FIGURES

Figure 1 - Earthquake Hazards Chart	19
Figure 2 - Earthquake Hazards Chart - Arctic Region	20

## FINAL TECHNICAL REPORT

During the course of subject contract we have reported on (1) design and construction of pressure measuring instruments and auxiliary equipment for studying earthquake aftershocks. Instruments were made for deployment by aircraft and by surface craft. (2) Design and construction of a vibrating string accelerometer instrument which AEC contractors installed on a shore cable near Amchitka to monitor earthquakes, (The shore-cable has subsequently failed). (3) The physical processes whereby earthquakes might damage submarines. We made preliminary estimates of the size of the effect; we surveyed the applicable literature, and initiated an important theoretical study of seaquake pressures by Dr. Paul Richards.

The present report completes work on subject contract with presentation of a Submarine Hazards Chart. Although a hazard calculation made without experimental data on seaquakes may turn out to be wrong, it does seem important to produce a tentative hazard chart based on earthquake statistics plus the meager strong motion data from continental earthquakes, and current models of earthquake source mechanisms. The chart gives statistical estimates of the likelihood that a submarine will experience a 20% change in apparent depth during a year of submerged operation. Conversion factors for other pressure changes are also given.

### A ROUGH HAZARD CHART FOR SUBMARINES IN EARTHQUAKE ZONES

#### Abstract

A tentative earthquake hazards chart for submarines is developed. It gives a rough statistical estimate of the likelihood that a submarine will experience significant increase in apparent depth because of a nearby earthquake. The chart has been calculated for 20% pressure increase, lasting for about 1 sec. Factors are presented for converting to other pressures.

#### Introduction

Although an extensive literature exists regarding observed effects of earthquakes on surface ships (Richter, 1958), (Rossi, 1969), there is little if any published information on what happens to a submerged submarine near an earthquake. In an unpublished letter, Carter (1970) indicates that the depth gauge suddenly showed a depth increase of approximately 15%, then a reduced depth, and finally settled back to normal within a total time of less than four seconds. The response characteristics of the depth gauge



were not described, but the actual pressure excursion was probably larger than the gauge indicated since the gauge was probably overdamped.

The reason for the pressure pulse can be described qualitatively in simple terms; but an accurate quantitative statement cannot be given, even in statistical terms, because few accelerograms showing motion near to earthquakes are available. Estimates of earthquake characteristics made earlier in the contract were based on discussions with Dr. James Brune, and on a number of theoretical and empirical relations for seismic motions (Aki 1967, 1968), (Bradner 1962, 1963), (Brune 1968, 1970), (Bath and Duda 1964), (Fedosenko and Cherkosov 1968), (Haskell 1969), (Kanai 1961), (King and Knopoff 1968), (Newlands 1952), (Press 1965), (Richards 1971).

The present estimates are based on engineering tables of expected accelerations, areas affected, and other earthquake characteristics in a recently published book, Earthquake Engineering (Wiegel, 1970). Though this book provides the primary data for the present hazard calculation, other literature will also be cited where it may have importance in more refined future calculations of hazard. The engineering data show a rapid fall-off of acceleration with distance, and hence imply that the hazard to submarines may be smaller than estimated early in the contract.

The reader is referred to chapters 1 and 4 of Wiegel for background information on earthquake waves in the vicinity of the earthquake source, and the character of strong ground motion.

Strong motion earthquake information is being extended rapidly (largely by work out of California Institute of Technology by Housner, Hudson, Trifunac and others). Present results indicate that accelerations may frequently be greater than the predictions of Wiegel (1970). The hazard to submarines should be reappraised in one or two years when a large number of strong motion records will have been analyzed.

#### Calculation of Hazards Chart

The calculation involves four main parts, (1) The ground acceleration spectrum vs. distance and earthquake magnitude, (2) the water pressure vs. depth, acceleration, and oscillation frequency, (3) the statistics of earthquake occurrence, (4) the combination of the first three parts to produce the hazards estimates. The steps will be discussed in this order.

The reader is cautioned that the calculations are very rough. We feel that the resultant Tentative Hazard Estimates may be accurate to a factor of two or three. They are probably not wrong by a factor of five.

## 1. Ground Acceleration:

### Qualitative Argument - Acceleration vs. Pressure

When a vertical compressional wave passes through water, each element of fluid effectively increases or decreases in weight in proportion to its vertical acceleration. An element accelerated upward  $8 \text{ ft. sec}^{-2}$ , or  $1/4 \text{ g}$ , would appear 25% heavier than its static weight. If the wavelength of the compressional wave is greater than the depth of the submarine (a common situation in a seismic wave) then the whole column of water above the submarine is accelerated upward at the same time, and the submarine can be subjected to a large increase in compressional force. In the numerical example given above, the  $1/4 \text{ g}$  vertical acceleration would increase the pressure on the submarine by 25%.

### Quantitative Argument - Acceleration

The increase of pressure on a submarine at any depth could be calculated if the earthquake acceleration spectrum at that depth were known. Housner (in Wiegel, chap. 4) discusses existing measurements of strong motion ground acceleration and describes the accelerations qualitatively in terms of the earthquake magnitude, fault slip dimensions, and distance.

In Table 4.3 of Wiegel, Housner tabulates idealized maximum ground accelerations and durations of strong phase of shaking. This table is reproduced as Table I of the present paper. Housner states, "Although the maximum ground accelerations decrease with distance from the causative fault, the rate of decrease is relatively small over a distance comparable to the vertical dimension of the slipped fault. Table 4.3 lists idealized maximum ground accelerations in the vicinity of causative faults for earthquakes of various magnitudes". Housner indicates that his values are, in general, on the high side; but subsequent data from the 1971 San Fernando Earthquake indicate that Housner's data are on the low side. More data are clearly needed. We used Wiegel (1970) chart in preparing the hazards, since that was the most complete engineering appraisal of strong motion earthquakes available at the time.

Table 4.4 of Wiegel, Housner shows the area in thousands of square miles that would experience a given percent of  $\text{g}$  acceleration, for various magnitudes of earthquake. This table is reproduced as Table II of the present paper. The magnitude entries are interpreted according to our Note 1 on Table II.

Housner also displays some observed earthquake spectra in Chapter 4, and discusses qualitatively the shape of the spectrum for various sizes of earthquake. In section 4.6, Housner states, "Although there is not a rich supply of recorded ground accel-

operations of destructive earthquakes, there are enough recordings to indicate general trends related to magnitude, distance from fault, etc. Idealized earthquake ground motions can then be described that will portray the general characteristics of the earthquake problem, in a probability sense. The recorded ground accelerations have been obtained mostly on relatively firm deep alluvium, so that the idealized earthquakes described in the following paragraphs are representative of ground motions on such ground. Actual ground motions, of course, may deviate from the idealized motions."

Bolt (in Wiegel, Sect. 1.3) shows that a low-rigidity surface layer can increase the amplitude of ground motion by a large factor. He calculates as an example that a 100 meter thick layer of alluvium over-lying shale bedrock will increase the amplitude of a 3Hz compressional wave by a factor of about five. Brune (personal communication) notes that the situation is complicated further by the question of whether the ocean bottom in a particular earthquake is immediately against the faulting rock or is separated from it.

Although Housner states that the largest acceleration recorded in the United States during an earthquake of large magnitude was 0.33 g, accelerations in the order of 1 g have been observed in other earthquakes; and, in fact, an acceleration of 1.25 g was measured during the 1971 San Fernando earthquake (Jennings, 1970) after Housner's chapter was published. Comparative data on several large earthquake accelerations are presented in Table III (Data abstracted from Table 4, p. 135, of Jennings).

A number of attempts have been made to develop empirical or theoretical descriptions of earthquake motion. Kanai (1961) presented an empirical formula for the spectrum of strong earthquake motions, taking into account a surface layer over a semi-infinite medium. He assumed that the spectrum of ground velocity without the surface layer is constant between about 10Hz and a lower limit that depends on the earthquake magnitude. Aki (1967) assumed a flat spectrum of ground acceleration, in developing a scaling law of seismic spectrum for distant earthquakes. Brune (1970) describes near and far field displacement-time functions and spectra by considering a simple dislocation model of earthquakes. The theory implies a flat acceleration spectrum for periods shorter than a characteristic time  $\tau$  which is the order of the dimension of the fault break divided by the shear wave velocity. Brune (private communication) indicates that the spectrum can be taken as having an upper limit cut-off about 10Hz. Brune's theory seems to be generally accepted as giving an adequate description of earthquake motion, when attenuation due to spreading and dissipation is taken into account. The dissipation ( $Q$  approx. 200) causes actual earthquake acceleration spectra to be peaked, except at locations very close to the source. This point will be discussed later, in considering the effect of acceleration spectrum on the change of pressure vs. depth.

In a remarkable paper, Richards (1971) has developed a theoretical expression for the pressure that will be produced by a large class of earthquake fault ruptures under the ocean. His treatment is exact for a solid boundary under a fluid half space. He has calculated that the maximum pressure pulse on a deep submarine, from a rupture according to Brune's model, will be equivalent to a depth increase of 650 ft. This maximum pressure can be produced by moderate-sized earthquakes, since according to Brune's model, the energy release per unit area of fault rupture is nearly constant. Large earthquakes imply the rupture of large fault areas, and, therefore, will produce the pressure over large regions of the ocean. Richards' theory can be extended to include the case of a submarine near the water surface.

## 2. Water Pressure Due to a Seismic Wave

Consider a vertical plane wave traveling through the water and reflecting from a smooth air-water interface. In steady state, the acceleration at any point in the water can be written as the sum of the upward and downward waves,

$$\begin{aligned} a &= \omega^2 A \cos(\omega t - kh) + \omega^2 A \cos(\omega t + kh) \\ &= 2\omega^2 A \cos(\omega t) \cos(kh) \end{aligned}$$

This can be rewritten in terms of the surface acceleration  $a_0$

$$a = a_0 \cos(kh)$$

The pressure at any depth,  $h$ , can be viewed as the weight of the column of fluid above  $h$ . Upward acceleration of an element of volume  $dv$  and density  $\rho$  is exactly equivalent to an increase  $\rho a dv$  of its weight. Hence the plane wave will produce a pressure  $\Delta p$  at a depth  $h$ ,

$$\begin{aligned} \Delta p &= \int_{h=0}^h \rho a dh \\ &= \rho a_0 \sin(kh)/k \end{aligned}$$

The hydrostatic pressure at  $h$  is  $pgh$ , so

$$\Delta p/p = a_0 \sin(kh)/gh$$

Thus near the surface, the fractional increase in pressure is equal to the fractional  $g$  acceleration. At greater depths the effect is reduced by the factor  $\sin(kh)/kh$ .

Seismic waves will travel nearly vertically in the ocean because of the refraction produced by the large difference in sound velocity in water vs. ocean bottom rocks. The effect of this non-vertical component, and the effect of sea surface roughness can both be shown to be small. Focusing effects of individual earthquakes by ocean-bottom inhomogeneities may be large, but are not thought to change the statistical conclusions of this study very much.

The shape of the seismic spectrum will affect the depth at which the  $\sin(kh)/kh$  term becomes important. If Brune's flat acceleration spectrum with 10 Hz high frequency cut-off is assumed, without dissipation, then the correction factor of  $\frac{\sin(kh)}{kh}$   $dk$  is approximately 0.8 for a submarine at 300 ft. depth. However, actual observed earthquake acceleration spectra are not flat. The spectrum of the 1971 San Fernando earthquake (Jennings, p. 18) was peaked sharply between 2.5 and 3.5 Hz. Also, four out of the six spectra shown in Wiegell, pp. 85-89 were peaked sharply between about 2 and 4 Hz. The size of the pressure pulse at 300 ft. depth from such spectra will only be reduced 20%. Table IV shows calculated values of  $\sin(kh)/kh$  for a number of representative depths and frequencies. In the absence of more information, a correction figure of 0.8 will be arbitrarily adopted for all entries in the hazard calculation.

### 3. Earthquake Statistics

The ground accelerations shown in Tables I and II imply that shallow earthquakes of Richter magnitude 6.5 and above must be considered. (This magnitude will hereafter be listed as  $M_{6.5}$ .) Shallow earthquakes of magnitude between  $M_6$  and  $M_{6.5}$  may also give large enough accelerations to present a hazard out to distances of a few miles.

The list of earthquakes compiled by 10-degree latitude and longitude intervals for the World Seismicity Maps (Baranovskii and Dorman, 1967) has been used to find the number of shallow earthquakes in each 10-degree square of latitude and longitude during a seven-year period. Dorman (personal communication) indicates that while the depths and locations are sufficiently accurate, the magnitude statistics cannot be inferred accurately from these data. Many earthquakes of  $M_6$  and even  $M_5$  are not reported because of the widely spaced observation stations. Therefore, the list of earthquakes has been used only to determine relative numbers of shallow earthquakes in the 10-degree squares. The statistics have been corrected, and the magnitude distribution has been computed according to the Gutenberg and Richter figures (1955) for worldwide yearly numbers of shallow earthquakes. (Table V). They show a yearly number of 7123 shallow

earthquakes of  $M \geq 4$ , or a total of 49,861 in seven years compared with 21,780 in the list for the World Seismicity Map. The difference is assumed to be due to those earthquakes that were missed by the worldwide network. It is thus assumed that the true corrected number of earthquakes of  $M \geq 4$  in a 10-degree square is 49,861/21,780 times the listed number, and further, that the true corrected number of earthquakes of  $M_7 - M_{7.5}$  is 70.7/21,780 times the listed number of earthquakes  $M \geq 4$  (See Table V).

Gutenberg and Richter give an empirical equation for the worldwide yearly number of shallow shocks. The present study uses a slightly different relation for the number  $n$  of earthquakes per unit magnitude:

$$\ln n = 17.85 - 2.05 M$$

which fits the region above  $M_5$  very well, as shown in column 3 of Table V.

The total yearly number of shocks in any magnitude interval  $M_a - M_b$  will then be

$$N = \int_{M_a}^{M_b} e^{17.85 - 2.05 M} dM$$

This empirical relation has been used to calculate the relative numbers of shocks in the half-magnitude ranges of Table II. Table VI shows the result of multiplying these relative numbers of shocks by the areas affected, and thus is indicative of the relative probability that an area will experience a given acceleration during a year. Note for each level of acceleration, that the contributions from the different magnitude earthquakes are quite similar.

The last two columns of Table VI show the ratio of total area affected by all earthquakes to the area affected by earthquakes of  $M_7 - M_{7.5}$  and by earthquakes of  $M_8 - M_{8.5}$ , respectively.

#### 4. Hazard Estimates

Hazard charts are presented in Figures 1 and 2. These are the Barazangi and Dorman (1969, 1970) charts overlaid with numbers that show the calculated percent probability that a submarine will experience a 20% pressure change during one year of submerged operation in seismic regions that are shown as dense areas of dots. Regions of less than 1/2% probability are not marked.

The Barazangi and Dorman seismicity charts are based on a seven-year length of observations; and therefore are not truly represen-

tative of long-term seismicity in some parts of the world. The seismic activity appears anomalously high around the western tip of the Aleutian chain because of the Kat Island earthquakes. The long term seismic activity around Japan may be roughly a factor of three higher than it was during the 1961-1967 period. The activity around Chile is reported to be sporadically high, with extended quiet periods. 1961-1967 was a quiet period.

The assumptions made in calculating the chart are listed briefly here:

- 1) The worldwide number of shallow earthquakes is correctly given by Gutenberg and Richter (1965).
- 2) The magnitude distribution everywhere follows the relation,  $\ln n = 17.85 - 2.05 M$ .
- 3) The Barazangi-Dorman (1969, 1970) tabulations of earthquakes are valid in location and depth, but not in magnitude or total number. Many earthquakes of  $M_4$  and  $M_5$  were omitted.
- 4) The Barazangi-Dorman shallow earthquake distributions in  $10^\circ$  latitude-longitude regions can be corrected by applying (1) and (2) to them.
- 5) The area covered by ground accelerations of different percentages of  $g$  is correctly given by Housner (in Wiegel, 1970). (See discussion below).
- 6) The relative total areas affected at different levels of ground acceleration can be obtained by combining (2) and (5), to get Table VI.
- 7) The total area affected at any one level of ground acceleration can be found by calculating the actual area affected by earthquakes of  $M_7$  to  $M_{7.5}$ , and multiplying by the appropriate ratio factor in Table VI. The same procedure will work with earthquakes of  $M_8$  to  $M_{8.5}$ , but with probably less accuracy.
- 8) The submarine will experience an effective fractional change in depth equal to 80% of the fractional  $g$  acceleration. (See discussion below).
- 9) The probability of experiencing such a pressure pulse is equal to the ratio of affected area to the oceanic area of high seismicity in the  $10^\circ$  latitude-longitude region.
- 10) The hazard is taken to be the probability that a submerged submarine will experience at least 20% increase in pressure at some time during one year of submerged operation in the immediate region of high seismic activity.
- 11) An area of high seismicity is considered to be a region

with a concentration of earthquake epicenter dots on the chart. Operation 100 miles outside a well defined area of high seismicity will reduce the hazard to a negligible value. (See discussion below).

12) The hazards of other values of pressure increase can be calculated by multiplying  $M_8$  entries in Table II by Table VI.

13) The probability of a 20% pressure increase in any  $10^0$  latitude-longitude square will be taken as

$$\text{Hazard} = \frac{TNKArf \cos L}{FS}$$

- where
- T is time of submerged operations (in years)
  - N is uncorrected number of earthquakes of 0-100 km depth per seven years in  $10^0$  latitude-longitude zone; from Barazangi and Dorman. (See assumption 3).
  - K is correction factor for converting N to the true number of  $M_7 - M_{7.5}$  earthquakes. (Taken as  $70.7/21,780$ . See discussion below).
  - A is area that will experience an acceleration of  $> 0.25g$  from an earthquake of  $M_7 - M_{7.5}$ . (See Table II and assumption 5).
  - r is ratio of total area affected by all earthquakes, to area affected by earthquakes of  $M_7 - M_{7.5}$ . (See Table VI and assumption 6).
  - f is fraction of seismic events of  $10^0$  zone that occur in the ocean.
  - F is fraction of  $10^0$  zone that shows seismic activity. (See assumption 11, and discussion below).
  - L is latitude of the zone (for calculating its area).
  - S is area of  $10^0$  latitude-longitude zone at equator.

##### 5. Discussion of Factors Used in Hazards Calculation (Assumptions 5, 8, 11 and 12)

###### Ground Acceleration (Assumption 5)

Table II has been used for ground acceleration in this hazards estimate. It is thought to present reasonable values for expected accelerations from undersea earthquakes, though it



does not show the highest accelerations that might occur. Note, for example, that the highest accelerations measured in the 1971 San Fernando earthquake (1.25g) and the 1940 El Centro earthquake (0.33g) were at least five times as large as extrapolations of Table II would lead one to expect.

#### Correction Factor for Submarine Depth (Assumption 8)

The discussion in the early part of this paper emphasized that the correction factor for submarine depth is sensitively dependent on the shape of the earthquake acceleration spectrum. The observed spectra imply that the variation with depth will not be greater, for the normal range of submarine operation. (See Table IV). Observed data have been used for all parts of the hazards calculation, and an arbitrary value of 0.8 has been taken as sufficiently accurate for all submarine depths. The resulting estimates of pressure may be too conservative in deep submarine operation.

#### Region of High Seismicity (Assumption 11)

The fraction of seismic events in a  $10^{\circ}$  square that occur in the ocean and the fraction of the  $10^{\circ}$  square with high seismicity were both estimated by looking at the large-scale Barazangi and Dorman World Map of epicenters at 0-100 km depth. The edge of the highly seismic zone was considered to be reached where the number of epicenters per unit area dropped to about 1/4 of their concentration inside the zone. The estimates of active zone area in a  $10^{\circ}$  square are subjective, and easily may be inaccurate to a factor of two in some zones of moderate hazard.

The areas of high seismicity in latitudes above  $70^{\circ}$  North were estimated in a similar way from the Barazangi and Dorman (1970) Arctic map.

#### Probability of Other Size Pressure Increase (Assumption 12)

The hazard chart has been calculated for a 20% depth change. Hazard estimates for other pressures; i.e., other accelerations than 0.25g have been calculated by multiplying the area covered by an  $M_8$  quake in Table II, times the appropriate entry from the last column of Table VI. The resulting values have been normalized to give the following conversion factors for hazard of different effective depth changes than 20%:

To find hazard of 12% pressure increase, multiply chart figures by 5.4										
"	"	"	"	20%	"	"	"	"	"	1
"	"	"	"	24%	"	"	"	"	"	0.45
"	"	"	"	28%	"	"	"	"	"	0.18
"	"	"	"	32%	"	"	"	"	"	0.04

Brune's theory would imply a less rapid fall-off of acceleration with distance. For conservatism the last entry should be increased to 0.1 or 0.2 instead of 0.04.

#### ACKNOWLEDGEMENTS

We wish to thank a number of persons at Scripps Institution of Oceanography, Institute of Geophysics and Planetary Physics, and Lamont Geological Observatory for their helpful criticisms of this report. We are especially indebted to James Brune, Walter Munk, George Shor, James Dorman, and Mihailo Trifunac.

This research was supported by the Advanced Research Projects Agency, Department of Defense, and was monitored by the Office of Naval Research under Contract No. N00014-69-A-0200-6012.

## REFERENCES

- Aki, K., Scaling law of seismic spectrum, *J. Geophys. Res.*, **72**, 1217-1231, 1967.
- Aki, K., Seismic displacements near a fault, *J. Geophys. Res.*, **73**, 5359-5376, 1968.
- Barazangi, M. and J. Dorman, World Seismicity Maps compiled from ESSA, Coast and Geodetic survey, Epicenter Data, 1961-1967, *Bull. Seis. Soc. Am.*, **59**, 369-380, 1969.
- Barazangi, M., and J. Dorman, Seismicity Map of the Arctic compiled from ESSA, Coast and Geodetic Survey, Epicenter Data, January 1, 1961 through September, 1969, *Bull. Seis. Soc. Am.*, **60**, 1741-1743, 1970.
- Bath, M., and S. J. Duda, Earthquake volume, fault plane area, seismic energy, strain, deformation, and related quantities, *Ann. Geophys. Rome*, **17**, 353-368, 1964.
- Bradner, H., Pressure variations accompanying a plane wave propagated along the ocean bottom, *J. Geophys. Res.*, **67**, 3631, 1962.
- Bradner, H., Probing sea-bottom sediments with microseismic noise, *J. Geophys. Res.*, **68**, 1788, 1963.
- Brune, J. N., Seismic moment, seismicity, and rate of slip along major fault zones, *J. Geophys. Res.*, **73**, 777-784, 1968.
- Brune, J. N., Tectonic stress and the spectra of seismic shear waves from earthquakes, *J. Geophys. Res.*, **75**, 4997-5009, 1970.
- Fedosenko, V. S., and Cherkosov, L. V., Internal waves from submarine earthquakes, *Izv. Atmos. & Ocean. Phys.*, **4**, 1197-1203, 1968.
- Gutenberg, B. and C. F. Richter, *Seismicity of the earth*, Stechert Hafner, New York, 1965.
- Haskell, N., Elastic displacements in the near-field of a propagating fault, *Bull. Seis. Soc. Am.*, **59**, 805-808, 1969.

- Hudson, D. E., M. D. Trifunac, F. E. Udwadia, A. Vijayaraghavan, and A. G. Brady, Strong-motion earthquake accelerograms. See especially Vol. IV, *Fourier spectra*, Earthquake Eng. Res. Lab. EERL 71-100, Calif. Inst. of Tech., 1971, and subsequent publications.
- Jennings, P. C., Ed., *Engineering features of the San Fernando earthquake of February 9, 1971*, Calif. Inst. Technol. EERL
- Kanai, K., An empirical formula for the spectrum of strong earthquake motions, *Bull. Earthq. Res. Inst.*, **39**, 85-95, 1961.
- King, C. Y. and L. Knopoff, Stress drop in earthquakes, *Bull. Seis. Soc. Am.*, **58**, 249-257, 1968.
- Newlands, M., The disturbance due to a line source in a semi-infinite elastic medium with a single surface layer, *Phil. Trans. Roy. Soc. (Lond.) A*, **245**, 213-308, 1952.
- Press, F. F., Displacements, strains, and tilts at teleseismic distances, *J. Geophys. Res.*, **70**, 2395, 1965.
- Richards, P. G., A theory for pressure radiation from ocean-bottom earthquakes, *Bull. Seis. Soc. Am.*, **61**, 707-721, 1971.
- Richter, Charles F., *Elementary Seismology* W. H. Freeman, San Francisco, 1958, 117-119 has a good summary of seaquake observations.
- Rossi, F. P., Ens., Seaquakes: shakers of ships, *Mariner's Weather Log*, **11**, (5), 161-164, 1969, describes many observations.
- Wiegel, R. L., Co-ord. Ed., *Earthquake engineering*, Prentice-Hall, New Jersey, 1970.

TABLE I

MAXIMUM GROUND ACCELERATIONS AND  
DURATIONS OF STRONG PHASE OF SHAKING

---

Magnitude	Peak acceleration (% g)	Duration of strong motion (sec)
5.0	9	2
5.5	15	6
6.0	22	12
6.5	24	18
7.0	37	24
7.5	45	30
8.0	50	34
8.5	50	37

---

TABLE II

AREA IN 1000 mi<sup>2</sup> COVERED BY GROUND ACCELERATION (% g)

Acceleration	M <sup>(1)</sup>						
	5.0	5.5	6.0	6.5	7.0	7.5	8.0
> 5	0.4	1.6	3.6	6.8	13.	28.	56.
> 10		0.6	1.6	3.6	7.6	14.	32.
> 15			0.6	2.0	4.4	9.6	21.
> 20				0.9	2.5	6.0	14.
> 25					1.3	4.0	10.
> 30					0.25	2.0	6.4
> 35						0.6	4.0
> 40							1.2

Note (1) M 7.0 is taken to mean the magnitude range 7 - 7.5, etc.

TABLE III

<u>Earthquake</u>	<u>Magnitude</u>	<u>Distance, km</u>	<u>Peak Acceleration g</u>
San Fernando 1971	6.1	5	1.25
El Centro 1940	6.4	10	0.33
Parkfield 1966	5.5	0.2	0.55
Koyna, India	6- 6.3	5	0.63

TABLE IV

CALCULATED  $\left| \frac{\sin(kh)}{kh} \right|$  CORRECTION VALUES  
FOR VARIOUS DEPTHS AND SEISMIC WAVE FREQUENCIES

<u>Depth (feet)</u>	<u>Frequency (Hz)</u>			
	1	2	3	4
200	1	1	0.3	0.8
500	1	0.8	0.5	0.2
1000	0.7	0.2*	0.2*	0.2

\*The first zero of  $\frac{\sin(kh)}{kh}$  occurs between 2 and 3 Hz, at a depth of 1000 ft. It lies beyond 4 Hz at 500 ft depth.

TABLE V  
FREQUENCY OF OCCURRENCE OF SHALLOW EARTHQUAKES

<u>Magnitude Range</u>	<u>Number of shocks per year</u>	<u>Calculated Number<sup>(1)</sup></u>
3 - 4	44,000	50,000
4 - 5	6,200	6,500
5 - 6	800	800
6 - 7	108	108
7 - 7.8	13	13
7 3/4 - 8.7	2.2	3.3
7 - 7.5		10.1

(1) Number of shocks has been calculated by the empirical relation

$$\ln n = 17.85 - 2.05 M.$$

This differs from Gutenberg and Richter's relation but fits their tabulated values better.

TABLE VI  
RELATIVE TOTAL AREAS AFFECTED BY EARTHQUAKES DURING 7-YEAR PERIOD <sup>(1)</sup>

<u>Acceleration</u> <u>% of g</u>	<u>Magnitude<sup>(2)</sup></u>					<u>Ratio of total to M<sub>7</sub></u>	<u>Ratio of total to M<sub>8</sub></u>
	<u>6</u>	<u>6.5</u>	<u>7</u>	<u>7.5</u>	<u>8</u>		
≥ 15	4.6	5.6	4.4	3.4	2.7	4.7	8.0
≥ 20		2.5	2.5	2.2	1.8	3.6	5.3
≥ 25			1.3	1.4	1.3	3.1	3.1
≥ 30			0.25	0.7	0.82	7.1	2.15
≥ 35				0.22	0.51	—	1.4
≥ 40					0.15	—	1

(1) Normalized to a value of 2.5 for 0.2g acceleration from M<sub>7</sub> quake.

(2) Magnitude 7 means in the magnitude range 7 - 7.5, etc.



### Earthquake Hazards Chart


Fig 1

Calculated probability that submarine will experience 20% pressure change during one year of submerged operation. Calculations are based on world-wide seismic network observations for 1961-1967. The 23% value near the western tip of the Aleutian chain is anomalously high because of the Rat Island series of earthquakes. The 2% and 3% values near Chile and Japan are anomalously low compared with long-term observations in those regions.

### Earthquake Hazards Chart - Arctic Region

Fig 2

Calculated probability that submarine will experience 20% pressure change during one year of submerged operation.

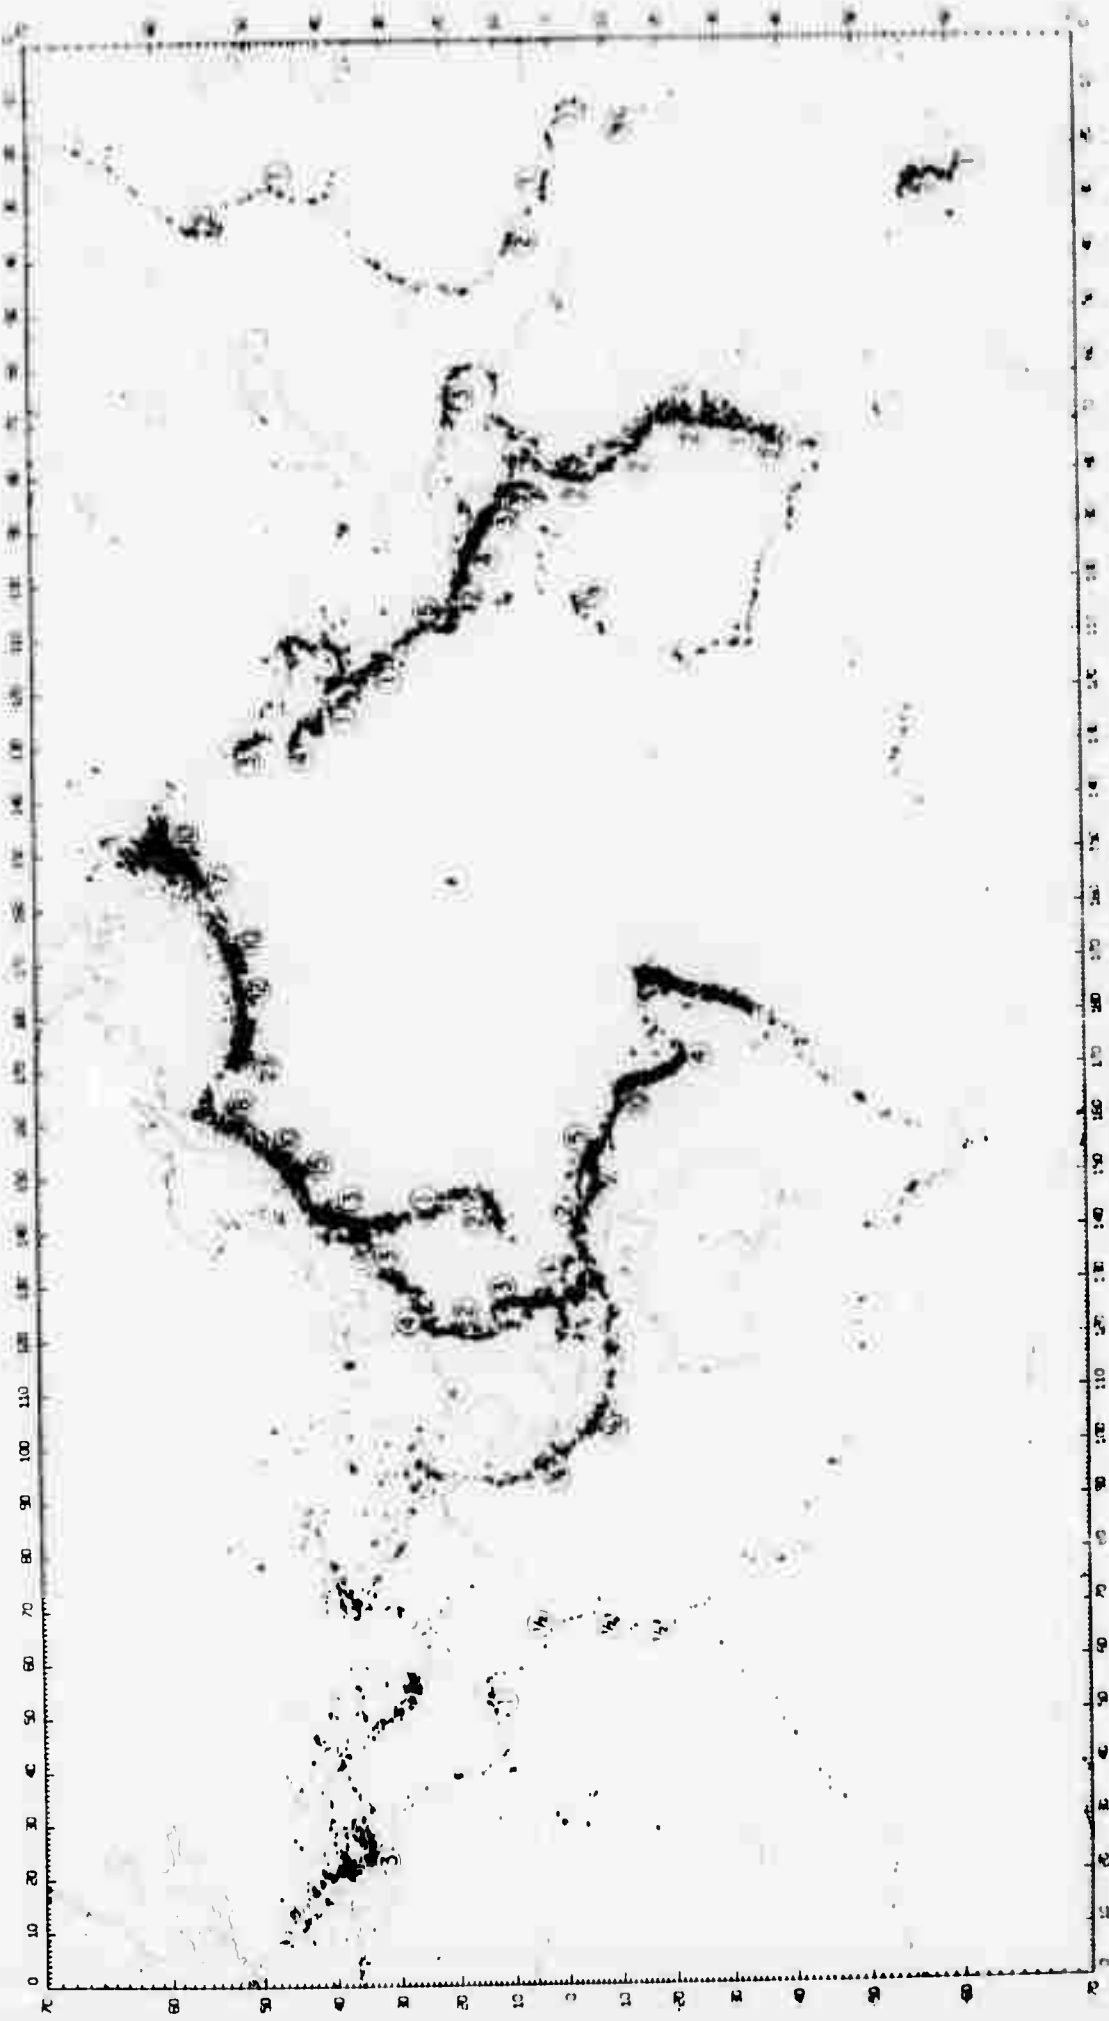

SEISMICITY OF THE EARTH, 1961-1967. ESSA. CGS EPCENTERS

DEPTHS 0-100 KM.

Figure 1

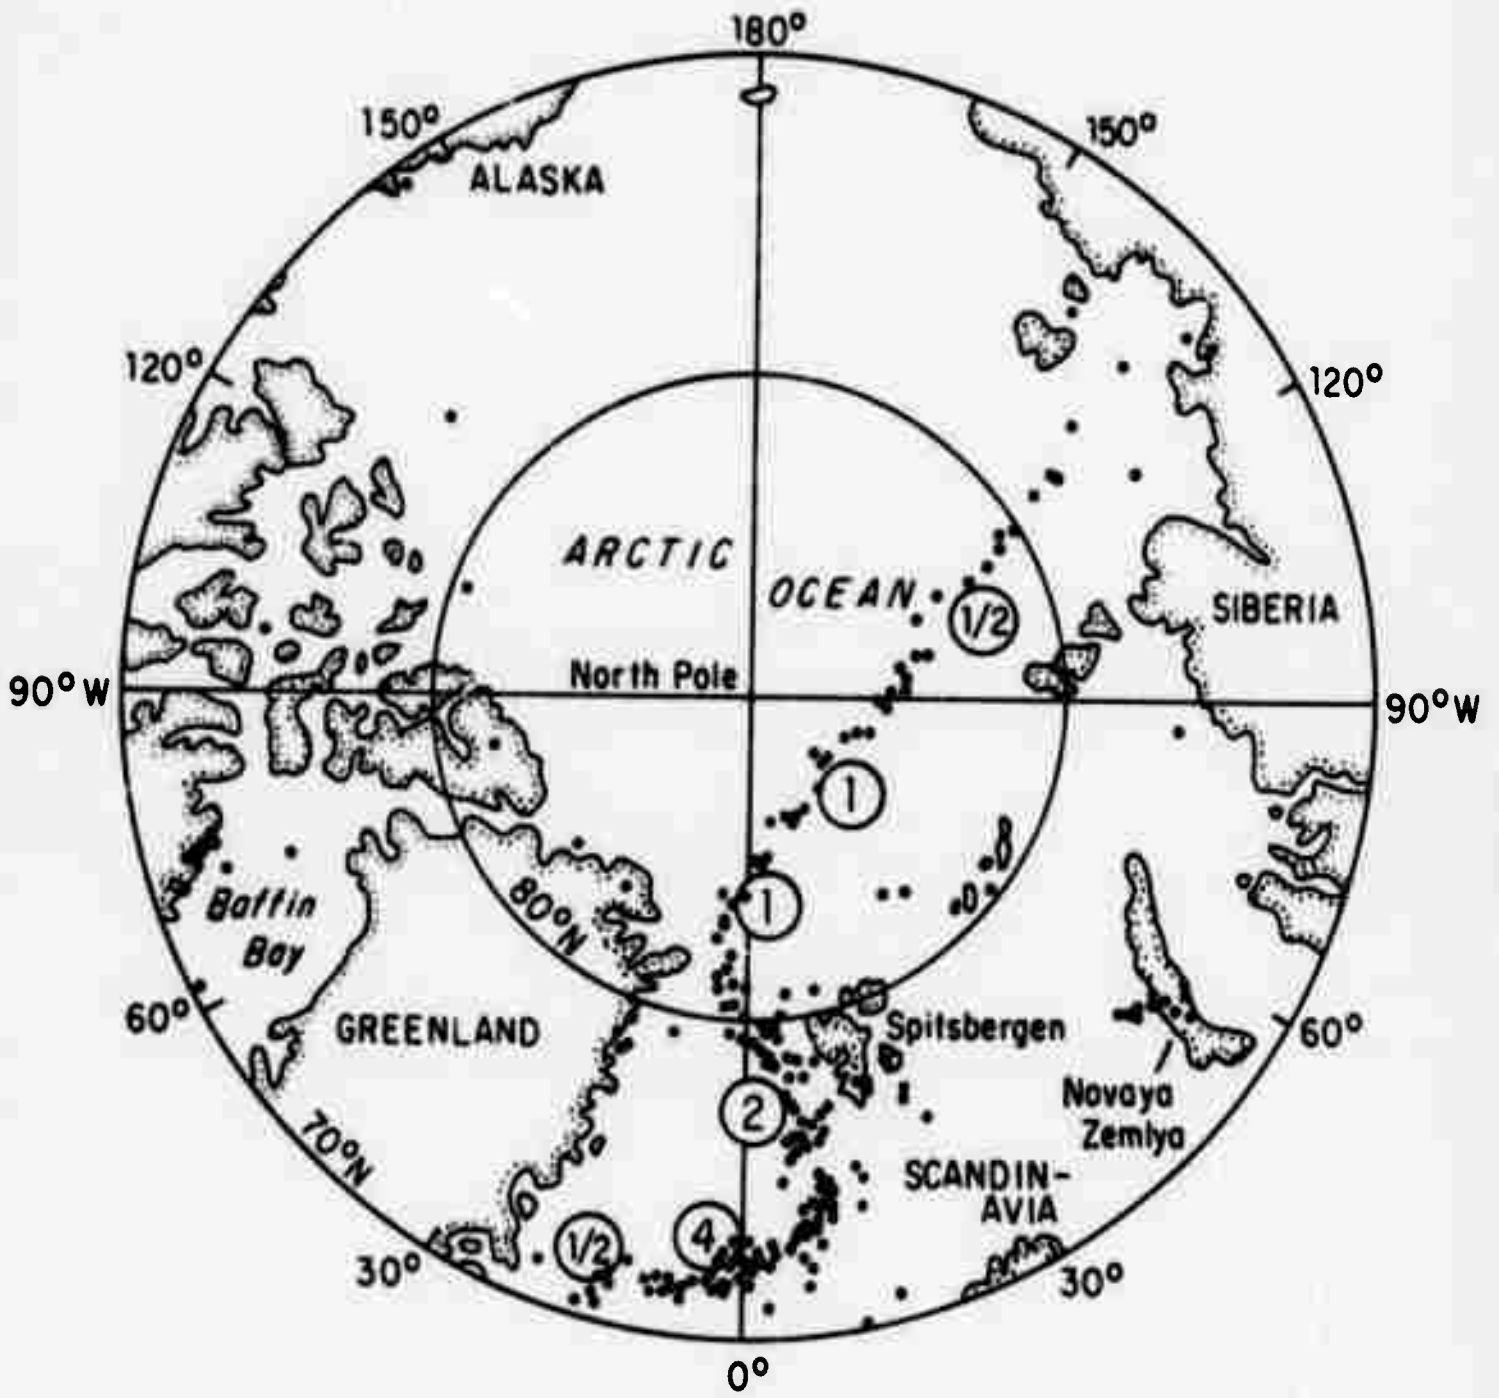


Figure 2